



Performance Curves

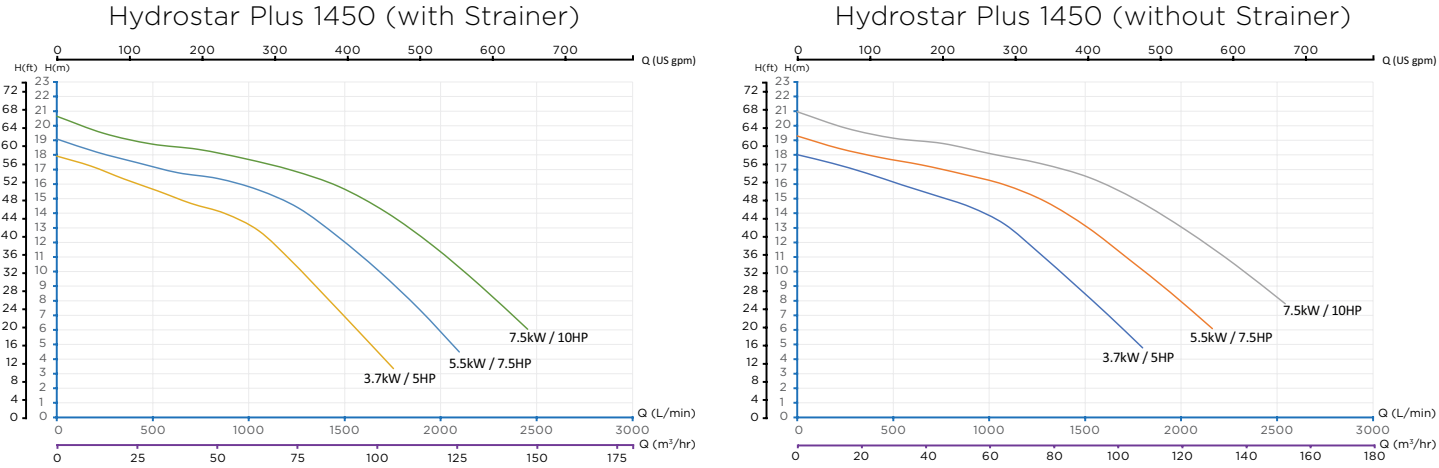

Noise Level

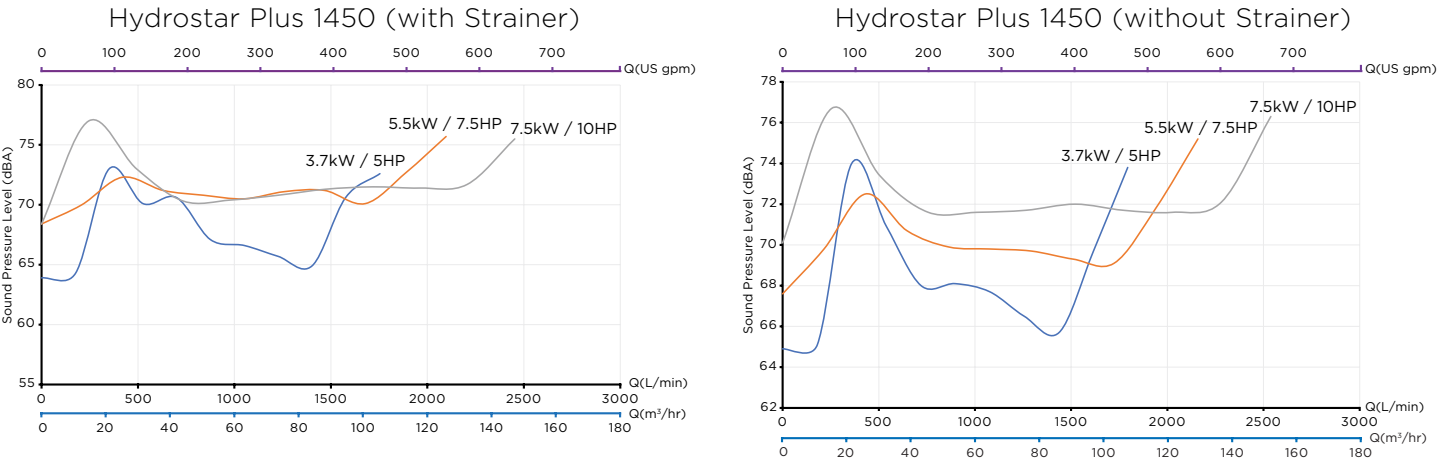

Hydrostar Plus 1450 - Models Available

P/N	Description	Power	Flanges	Seal Type	Strainer
24705004	HYDROSTAR PLUS 1450 3.7kW	3.7kW/5.0HP	4" JIS / 6" ANSI	Standard Seal	Included
24707504	HYDROSTAR PLUS 1450 5.5kW	5.5kW/7.5HP	4" JIS / 6" ANSI	Standard Seal	Included
24710004	HYDROSTAR PLUS 1450 7.5kW	7.5kW/10HP	4" JIS / 6" ANSI	Standard Seal	Included
2470501	HYDROSTAR PLUS 1450 3.7kW	3.7kW/5.0HP	-	Standard Seal	Not Include
2470751	HYDROSTAR PLUS 1450 5.5kW	5.5kW/7.5HP	-	Standard Seal	Not Include
2471001	HYDROSTAR PLUS 1450 7.5kW	7.5kW/10HP	-	Standard Seal	Not Include

12161002	HYDROSTAR PLUS FLANGE KITS Flange Kits
----------	--

Commercial Pumps Warranty - Commercial Applications

Conditions	Warranty Period
Wet ends	2 years
Hair & lint pot lid, o'ring, basket, impeller & diffuser	2 years
Motor and mechanical seal	1 year

Company Profile

Waterco pioneers reliable solutions for healthy, safe water environments, which are used in residential, commercial and industrial applications in over 40 countries.

Established in 1981 in Sydney, Australia, it has since become a global brand recognised for designing and manufacturing filtration and sanitisation innovations for the swimming pool, spa, aquaculture, and water purification sectors.

CONTACT WATERCO

Waterco's head office is situated in Sydney, Australia with international offices, manufacturing plants and warehouses located in Australia, New Zealand, Malaysia, Indonesia, Singapore, China, the US, Canada, and the UK.

OFFICES - AUSTRALIA NSW - Sydney (Head Office) Tel: +61 2 9898 8600 QLD - Brisbane Tel: +61 7 3299 9900 VIC/TAS - Melbourne Tel: +61 3 9764 1211 WA - Perth Tel: +61 8 9273 1900 SA/NT - Adelaide Tel: +61 8 8244 6000 ACT Distribution Tel: +61 2 6280 6476	OFFICES - OVERSEAS Waterco (Europe) Limited Sittingbourne, Kent, UK Tel: +44 (0) 1795 521 733 Waterco (USA) Inc Augusta, Georgia, USA Tel: +1 706 793 7291 Waterco Canada Boucherville, Quebec, Canada Tel: +1 450 748 1421 Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570	Waterco (C) Limited Guangzhou, China Tel: +86 20 3222 2180 Waterco (Far East) Sdn Bhd Selangor, Malaysia Tel: +60 3 6145 6000 PT Waterco Indonesia Jakarta, Indonesia Tel: +62 21 4585 1481 Waterco Singapore Intl Pte Ltd Nehsons Building, Singapore Tel: +65 6344 2378
---	---	--

DISTRIBUTED BY:



ZZB2034 09/20

For commercial pools, aquatic parks, and seawater facilities.

Waterco's pump's unique construction offers several advantages compared to steel pumps. Glass reinforced thermoplastic possesses superior mechanical and chemical resistance to steel.

Hydrostar Plus 1450

Hydrostar Plus 1450 pumps are high-performance corrosion-resistant thermoplastic pumps equipped with a 6" flanged inlet port and 4" flanged outlet port. The pump's 4 pole motor runs at 1450 rpm making them ideal for high water flow applications such as aquatic facilities, water parks and large commercial swimming pools.

Hydrostar Plus 1450 pump's main body is constructed from an injection moulded glass reinforced thermoplastic. Glass reinforced thermoplastic possesses superior mechanical and chemical resistance to steel.

Construction Materials

Item	Material
Motor Bracket	Polypropylene + GF
Pump Bracket	Polypropylene + GF
Pump Body	Polypropylene + GF
Pump Body (O Ring)	NBR
Seal Assembly	Alumina Ceramic/SS316/Carbon(*)
Impeller	Noryl + GF
Diffuser	Polypropylene + GF
Lock Ring	Noryl + GF

(*) Silicon Carbide optional

Lid

- Clear polycarbonate strainer lid
- Instant view of the strainer basket
- Lock ring with easy grip handles for easy maintenance
- Pressure relief valve

Discharge Port

- 4" JIS flange

Impeller

- CFD Designed
- Glass filled Noryl for long lasting reliability

Shaft Sleeve

- Corrosion resistance 431 stainless steel

Motor

- Heavy duty IP55 weather proofed 4 pole motor
- VSD compatible
- IE 3 Class

Basket Strainer

- Corrosion free glass reinforced thermoplastic
- UV stabilised
- Molded 17L polypropylene basket (FDA-grade)
- 6" ANSI flange suction port
- Max flow rate 2450 lpm (147 m³/hr) (647 US GPM)

Mechanical Seals

- Self- lubricating mechanical seals
- Marine grade seal also available

Base

- Glass reinforced moulded base for ease of mounting
- Designed to improve stability

Technical Specifications (with Strainer)


Model	Pump Input Power		Amps/Phase	Weight	Total Length	Motor input power	Motor I _{max}	Q _{max}	H _{max}
	(kW)	(HP)		(kg)	(mm)	(kW)	(Amp)	(m³/h)	(m)
3.7kW	4.16	5.57	8.7	89	1236	4.19	8.7	105.2	17.9
5.5kW	5.75	7.70	11.8	96	1274	6.14	11.8	125.8	19.1
7.5kW	7.76	10.40	16.3	112	1340	8.30	16.1	147.2	20.7

Technical Specifications (without Strainer)

Model	Pump Input Power		Amps/Phase	Weight	Total Length	Motor input power	Motor I _{max}	Q _{max}	H _{max}
	(kW)	(HP)		(kg)	(mm)	(kW)	(Amp)	(m³/h)	(m)
3.7kW	4.15	5.56	8.8	73	729	4.19	8.7	107.6	18.0
5.5kW	5.64	7.60	11.6	80	767	6.14	11.8	129.5	19.3
7.5kW	7.86	10.50	16.3	96	833	8.30	16.1	152.3	21.0

Phase	Volts	Cycle	RPM	Motor IP Rating	Pump IP Rating
3	400	50Hz	1450	IP55	X5

Pump Dimensions With Strainer (mm)

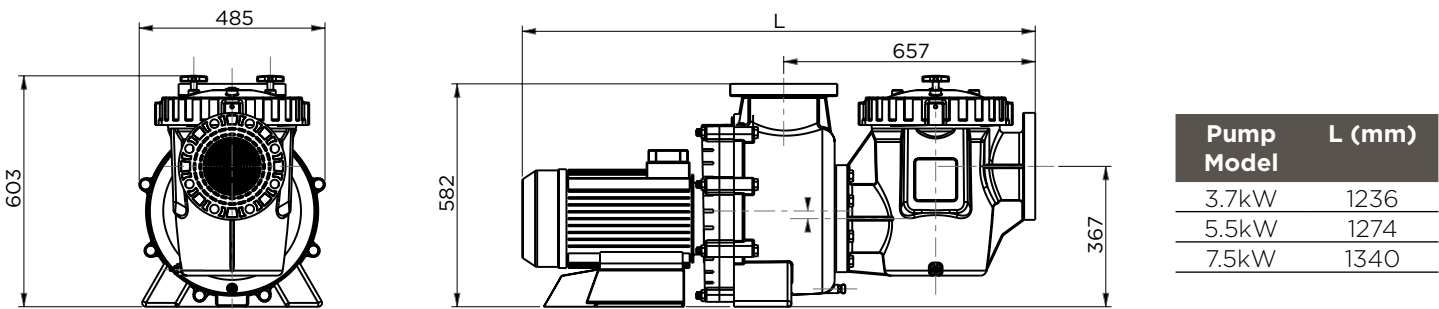

Pump Dimensions Without Strainer (mm)

