# EXTENDED SWIMMING SEASON

**SWIMMING POOL HEAT PUMPS** 



GEYSER | EXCELLENCE | ULTRA









## **ENERGY EFFICIENT HEATING**

A swimming pool is a major financial investment. Getting the most out of your pool, means keeping the pool at a swimmable temperature for the maximum number of hours each day and maximum number of days each year. A heat pump can economically keep your pool warm.

Compared to gas and electric heaters, Electroheat Heat Pumps use a fraction of the energy to generate the same amount of heat and unlike solar heating; there is no reliance on the sun as the latent heat in the air is used.

Electroheat Heat Pumps are an ideal solution for heating:


- Swimming pools to extend the season
- Swimming pools for year round enjoyment
- Plunge pools
- Swim spas and spas

## **COST EFFECTIVE HEATING**

Heat pumps only require energy to operate a compressor and a fan motor, using low amperage in the process.

For every 1kW of electricity consumed, Electroheat Heat Pumps can produce up to 5 kW of heat.

Save up to 80% over propane gas, 50% over natural gas and 500% over electric heaters.

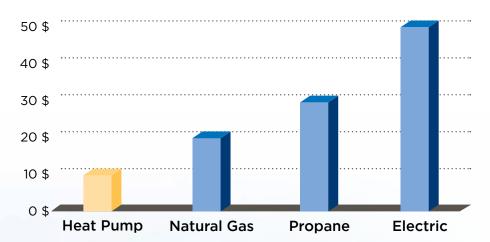



## **HOW ELECTROHEAT WORK**

Electroheat uses refrigeration technology to extract heat from the surrounding air and transfers it to the swimming pool.

#### **HEAT EXTRACTION**

The fan circulates air through the evaporator air coil that acts as a heat collector. The liquid refrigerant in the evaporator air coil absorbs the available heat from the ambient air.

#### **HEAT TRANSFER**

The heat from the hot refrigerant flowing inside the heat exchanger is then transferred to the pool water.


#### **HEAT INTENSIFICATION**

The compressor then receives the warmed refrigerant and intensifies the heat. The intensely hot refrigerant is then pumped into the heat exchanger.

#### **RECYCLE**

The refrigerant restarts the process and flows through the evaporator air coil to collect heat once again.

- 1. Warm air in
- 2. Fan
- 3. Evaporator
- 4. Warm gas
- 5. Cool air out
- 6. Compressor
- 7. Heat exchanger
- 8. Filter
- 9. Water Pump
- 10. Pool

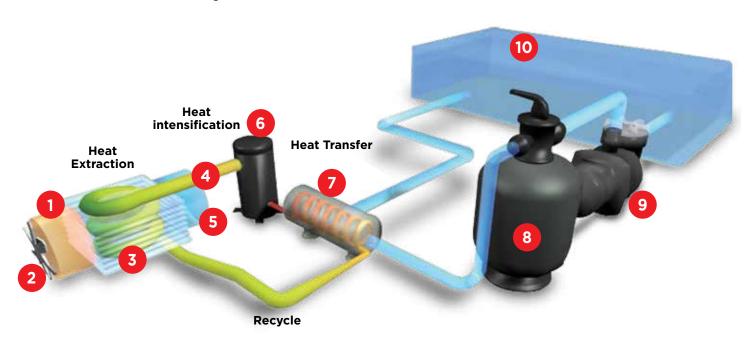



Electroheat Geyser heat pump offers compact solution of pool heating with energy efficient operation, featuring hot gas de-icing. Its horizontal ventilation allows versatility for greater installation options.





#### smart controls for temperature management and self diagnosis



INBUILT SAFETY DEVICES for water flow, refrigerant level and compressor startup delay



POWERFUL HEAT TRANSFER through the coiled heat exchanger maximising water contact



DUAL COIL TITANIUM
heat exchanger is
highly resistant
to ozone, iodine,
baquacil, salt and
chlorinated water



WEATHERPROOF CABINET for outdoor installation



R410A REFRIGERANT, ozone friendly and maximises performance



LARGE EVAPORATOR
AREA to extract more
ambient heat



Warranty - Residential

10 years - titanium heat exchanger
3 years - compressor
2 years - all other components
1 year - labour

Warranty- Commercial - 1 year



Electroheat Excellence heat pump comes with scroll compressor for energy efficient operation. It provides heating capacity up to 38 kW for large swimming pools.





smart controls for temperature management and self diagnosis



INBUILT SAFETY DEVICES for water flow, refrigerant level and compressor startup delay



POWERFUL HEAT TRANSFER through the coiled heat exchanger maximising water contact



DUAL COIL TITANIUM
heat exchanger is
highly resistant
to ozone, iodine,
baquacil, salt and
chlorinated water



SCROLL COMPRESSOR for improved efficiency and high performance



WEATHERPROOF CABINET for outdoor installation



R410A REFRIGERANT, ozone friendly and maximises performance



LARGE EVAPORATOR
AREA to extract more
ambient heat



Warranty - Residential

10 years - titanium heat exchanger
3 years - compressor
2 years - all other components
1 year - labour

Warranty- Commercial - 1 year



Electroheat Ultra heat pump can heat your pool in colder climates when the ambient air temperature is above 0 °C featuring hot gas de-icing. With heating capacity up to 44 kW, it is well-suited for larger pools.





smart controls for temperature management and self diagnosis



INBUILT SAFETY DEVICES for water flow, refrigerant level and compressor startup delay



POWERFUL HEAT TRANSFER through the coiled heat exchanger maximising water contact



DUAL COIL TITANIUM

Heat Exchanger is
highly resistant
to ozone, iodine,
baquacil, salt and
chlorinated water



SCROLL COMPRESSOR for improved efficiency and high performance



WEATHERPROOF CABINET for outdoor installation



R410A REFRIGERANT, ozone friendly and maximises performance



LARGE EVAPORATOR
AREA to extract more
ambient heat



Warranty - Residential

10 years - titanium heat exchanger
3 years - compressor
2 years - all other components
1 year - labour

Warranty- Commercial - 1 year

### Frequently asked questions

#### SHOULD I USE A POOL COVER?

The most effective way to prevent heat loss is to install a pool cover. An un-blanketed pool loses 2-3 times more heat than a blanketed pool. Pool covers virtually eliminate evaporation and reduce heat loss by insulating the surface of the pool, greatly reducing pool heating costs. As with all pool heaters, it would be advisable to use a pool cover at night, and when the pool is not in use.

# WHAT IS THE MINIMUM AMBIENT OPERATING TEMPERATURE?

The heat pump will actually operate down to an ambient air temperature of 10 °C, or 1 °C if fitted with hot gas deicing but with minimal heat output. Therefore, we recommend heat pumps be operated in the warmest part of a 24-hour period to increase operating efficiency.

# WHAT IS THE BEST LOCATION FOR THE ELECTROHEAT?

The location of the Electroheat is very important in keeping installation costs to a minimum, while providing for maximum efficiency of operation allowing adequate service and maintenance access.

The unit should be located as close as practically possible to the existing pool pump and filter to minimise water piping. The use of 90 degree bends and short radius elbows in the water piping should be kept to a minimum. Longer distances from the pool increase piping heat loss.

#### **CAN THE ELECTROHEAT BE ENCLOSED?**

The Electroheat is designed for outdoor installation and should not be installed in totally enclosed areas such as a shed, garage, etc., unless mechanical ventilation is provided to ensure adequate air exchange for proper operation. Re-circulation of cold discharged air back into the evaporator coil will greatly reduce unit's heating capacity and efficiency.

# WHAT IS THE ELECTROHEAT'S PERFORMANCE DEPENDENT ON?

Performance will fluctuate depending on water and weather temperatures. 5 important factors determine the performance of Electroheat:

- 1. Size of the pool
- 2. The desired temperature of the pool
- 3. Ambient air temperature the warmer the air, the better the performance
- 4. The presence of a pool cover
- 5. The size of the heater

## WHAT IS THE ELECTROHEAT'S HEATER RUNNING TIME?

Most units should be sized to operate during the pool filtering cycle time of 8 - 12 hours daily, providing a steady flow of heated water. On warmer days the heater will run less because the heat loss will be less.

Electroheat heat pumps have a lower heating capacity on a BTU/hr basis compared to fossil fuel based pool heaters such as gas heaters. Therefore, Electroheat heat pumps require longer operation to accomplish the desired temperature.

Between 10 °C to 18 °C, it will increase your water temperature by 3 °C to 5.5 °C a day. Over 21 °C you should obtain an increase up to 0.8 °C a hour and over 26 °C up to 1.1 °C an hour depending on the size of the pool, the size of the heat pump, the water temperature, and the ambient air temperature at the moment of operation.

Even though the Electroheat may require longer operation, it will still heat the pool far more economically.

# HOW DOES ELECTROHEAT COMPARE WITH SOLAR HEATING AND GAS HEATING?

#### Solar

- Fuelled by the power of the sun, solar heating systems are a low-cost method of heating up your pool water.
- As solar heating is reliant on the sun, they are best used to extend the swimming season.
- Virtually no operating costs, just the cost of electricity to pump pool water through the solar absorber on the roof.

#### **Gas heaters**


- Gas heaters are the fastest method for heating your pool, providing a comfortable temperature for swimming on demand. Gas is best for heating pools or spas for short periods of time.
- Gas heaters can easily maintain any desired temperature regardless of the weather.
- Gas heaters are effective, but expensive to operate.

#### **Heat pumps**

- Heat pumps may not heat up the swimming pool as fast as gas heaters, but are more energy efficient.
- Heat pumps require a small amount of electricity; its heat energy source is extracted from the ambient air.

| (2) | 1 |
|-----|---|
| 5   | j |
| α   | 2 |
| Š   |   |
| 'n  | j |
| 1   | 1 |

| Performance Specifications                         |                  |                  |                  |
|--|------------------|------------------|------------------|
| Product  | Geyser 15 kW     | Excellence 38 kW | Ultra 44 kW      |
| Nominal Power Output (kW)                          | 15               | 38               | 44               |
| Nominal Heating Capacity BTU                       | 51,000           | 130,000          | 150,000          |
| Power Output (kW): Air 26 °C / Water 26 °C / RH63% | 13.5             | 38.1             | 43.7             |
| COP  | 6.4              | 5.3              | 5.7              |
| Supply Voltage (VAC)                               | 220 - 240        | 208 - 230        | 440 - 460        |
| Frequency (Hz)                                     | 60               |                  |                  |
| Supply Voltage Phase                               | Single           | Single           | Three            |
| Power Consumption (kW/h)                           | 2.1              | 7.2              | 7.7              |
| Unit Running Amperage (Amp)                        | 9.3              | 31.6             | 13.0             |
| Minimum Breaker or Fuse (Amp)                      | 20               | 50               | 32               |
| Min. / Max. Ambient Air Temperature (°C)           | 11 / 40          | 10 / 40          | 1 / 40           |
| Min. / Max. Water Inlet Temperature (°C)           | 10 / 40          | 18 / 40          | 10 / 40          |
| Water Connections (mm)                             | 40               |                  |                  |
| Min. / Max. Water Flow Rate (m³/h)                 | 6.7 / 18.0       | 6.8 / 18.1       | 7.8 / 18.0       |
| Weight (kg)  | 54               | 100              | 93               |
| Dimensions W x L x H (mm)                          | 1170 x 320 x 685 | 890 x 940 x 990  | 890 x 880 x 1130 |
| Refrigerant  | R410A            |                  |                  |
| Fast Defrost                                       | Yes              |                  |                  |

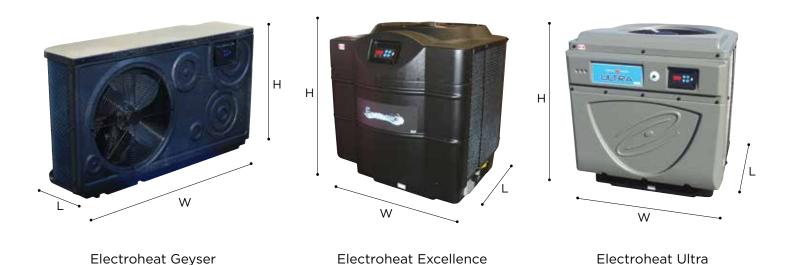

#### CONTACT WATERCO

Waterco's head office is situated in Sydney, Australia with international offices, manufacturing plants and warehouses located in Australia, New Zealand, Malaysia, Indonesia, Singapore, China, the US, Canada, and the UK.

#### **OFFICES - AUSTRALIA**

NSW - Sydney (Head Office) Tel: +61 2 9898 8600 QLD - Brisbane Tel: +61 7 3299 9900

VIC/TAS - Melbourne Tel: +61 3 9764 1211 WA - Perth

Tel: +61 8 9273 1900 SA/NT - Adelaide Tel: +61 8 8244 6000

ACT Distribution Tel: +61 2 6280 6476

#### OFFICES - OVERSEAS

Waterco (Europe) Limited Sittingbourne, Kent. UK Tel: +44 (0) 1795 521 733

Waterco (USA) Inc Augusta, Georgia, USA Tel: +1 706 793 7291

Waterco Canada Boucherville, Quebec, Canada Tel: +1 450 748 1421

Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570

Waterco (C) Limited Guangzhou, China Tel: +86 20 3222 2180

Waterco (Far East) Sdn Bhd Selangor, Malaysia Tel: +60 3 6145 6000

PT Waterco Indonesia Jakarta, Indonesia Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd Nehsons Building, Singapore Tel: +65 6344 2378

#### DISTRIBUTED BY:



